



MILACRON®

THE LPIM



SERIES 500-2500

THE LPIM

(LOW PRESSURE INJECTION MOLDING)

Milacron has set the standards, driven innovation and led the industry in Multi-Nozzle Low Pressure Injection Molding Technologies for more than four decades. These machines can be used for structural foam, structural web, gas assist, solid molding or combinations of these technologies depending on the application.



MILACRON OFFERS ADVANCED TECHNOLOGIES FOR STRUCTURAL FOAM AND STRUCTURAL WEB GAS ASSIST, ENABLING CUSTOMERS TO MOLD ULTRA-LARGE PLASTIC PARTS NOT POSSIBLE WITH OTHER MOLDING TECHNOLOGIES.

- M Built with Milacron proven technologies used on our standard injection molding machines.
- M Multi-Nozzle machine with Modular Hot Runner system (no in-mold hot runner necessary) lowers tooling investment on a project by project basis.
- M Rugged Clamp Design with large platen sizes allow for multiple molds to be run simultaneously for higher productivity.
- M Large Selection Injection/Melt Units for wide variety of applications and output capabilities.



MULTI-NOZZLE LOW PRESSURE INJECTION MOLDING — LARGE STRUCTURAL PLASTIC PARTS

CLAMP FEATURES

- Way support system for increased mold weights (standard)
- Extended daylight and stroke (optional)
- Semi-automatic tie bar puller (optional)

LARGE RIGID 3-PLATEN DESIGN

- Distributed tonnage cylinders for even clamp pressure across wide platens
- Stationary platen with modular hot runner for multiple molds
- Clamp speed performance and improved clamp dry cycle times

INTEGRATED HOT RUNNER CONTROLLER (OPTIONAL)

- Mold-Masters TempMaster iM2 Controller
- Seamless integration
- Reduced mold interface complexity
- Virtual Network Control (VNC) controlled via the Mosaic Plus control screen
- Widest selection of interchangeable control cards
- Superior control of external melt delivery system
- Ability to run molds with in-mold hot runners (optional)

INTEGRATED ROBOTS (OPTIONAL)

- Ultimate in mounting flexibility
- Integrated robot control through machine HMI



MILACRON M-POWERED

- Designed to fully utilize our M-Powered Suite of connectivity products
- Reduces failures, improves uptime and OEE



CLAMP FEATURES

- Enhanced hydraulic core/ejector valve package standard
- Hydraulic Ejector Plate (optional)

MOSAIC + CONTROL


- 21" multi-touch screen with configurable "PLUS" area
- Integrated auxiliary equipment screens
- Integrated remote camera interface provides an additional set of eyes monitoring the entire machine (optional)

FANUC MOTOR AND DRIVE PACKAGE

- Servo driven machine performance and superior reliability
- Up to 25% energy savings
- Digital control of pressure and flow via servo system
- Closed loop clamp and injection control
- Fixed gear pumps for improved reliability
- Quiet machine operation
- Offers fast acceleration rate and utilizes highly efficient and powerful permanent neodymium magnets

LARGE SELECTION OF MELT UNITS

- Single or dual extruder machines
- Extruder sizes from 3" to 7"
- Shot sizes from 75lbs to 400lbs
- Configurable to application

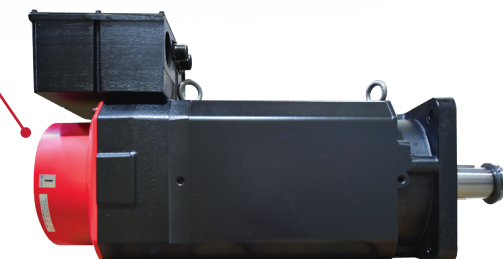

PROVIDING THE HIGHEST PERFORMANCE,
PRECISION AND FLEXIBILITY.


LPIM SERIES

Milacron's LPIM machines are designed for tremendous shot size capacity of either single or multiple cavities of large projected area parts, or families of smaller parts. Shot sizes are available up to 400 lbs. (180 kg) and extruder throughputs of up to 6400 lbs per hour (2902 kg/hr). Clamp sizes are available from 500 US tons to 2500 US tons with platen sizes up to 110" x 200" (2800 x 5080mm)

MACHINE CONFIGURATIONS

MODEL	500M	750MWP	1000MWP	1000MSWP	1500MHP	2500HMWP
PLATEN SIZE (H X V) (IN AND MM)	89 x 98 2489 x 2261	167 x 86 2184 x 4241	167 x 103 2616 x 4241	186 x 103 2616 x 4724	161 x 107 2712 x 4089	200 x 110 2794 x 5080
MAXIMUM SHOT SIZE PS/HDPE LBS/KG	150/120 lbs 68/54 kg	200/160 lbs 91/73 kg	200/160 lbs 91/73 kg	200/160 lbs 91/73 kg	200/160 lbs 91/73 kg	300/240 lbs 136/108 kg
MAXIMUM THROUGHPUT LBS/HR KG/HR	2400 lbs/hr 1088 kg/hr	4800 lbs/hr 2176 kg/hr	4800 lbs/hr 2176 kg/hr	6400 lbs/hr 2902 kg/hr	6400 lbs/hr 2902 kg/hr	6400 lbs/hr 2902 kg/hr

Maximum Platen Configurations Shown, Consult Factory for Other Configurations

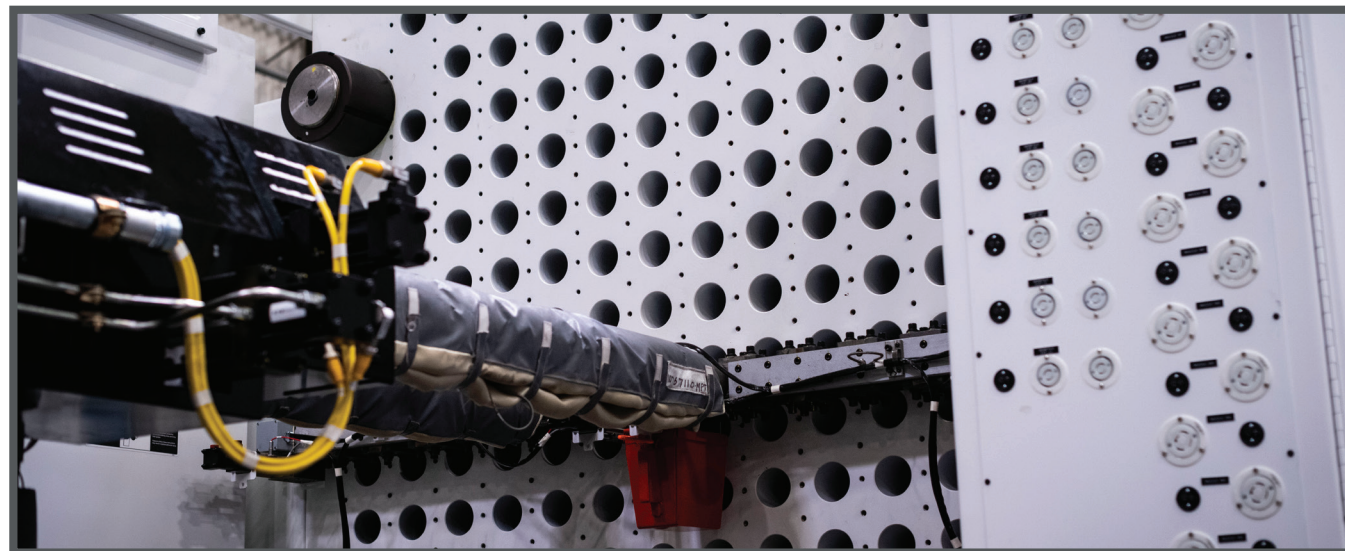

APPLICATIONS

Milacron LPIM machinery is recommended for injection molding large structural plastic products.

- *ATV/WATERCRAFT*
- *RECREATION*
- *AGRICULTURAL & CONSTRUCTION*
- *ELECTRICAL*
- *BUILDING & CONSTRUCTION*
- *RETURNABLE PACKAGING*
- *INDUSTRIAL STORAGE*
- *INSTITUTIONAL/COMMERCIAL*



STRUCTURAL FOAM PROCESS

A foaming agent (N₂ gas) is mixed with the melt and short-shot through a modular multiple nozzle system into a single or multiple mold(s). The injection pressure and expanding gas/polymer cellular mixture act to fill the mold cavity with no pack or hold pressure.

BENEFITS:

- Mold cavity pressures are 10-20x less than conventional injection molding
- 15-30% reduction in part weight
- Ability to mold large parts with a high rigidity
- Reduced part stress, warpage, and elimination of sink marks
- Multiple parts can be molded in a single cycle
- Low cavity pressure permits use of lower cost aluminum molds

STRUCTURAL WEB PROCESS

Structural web (SW) parts are solid with hollow channels and hollow thick sections packed out by internal injection of low pressure N₂ gas through the multiple nozzles. The SW process produces a smooth, sink-free finish with good color, uniformity and cosmetics.

BENEFITS:

- Smooth, uniform surface finish (no swirl marks)
- Reduced cycle times for very large parts
- 15-30% part weight reduction over solid parts
- Dual wall thickness with high stiffness-to-weight ratio
- Elimination of sink marks opposite of ribs and thick wall sections




CLAMPING UNIT

- Heavy duty fully hydraulic clamp infinitely adjustable tonnage
- Three clamping cylinders for balanced force distribution. Center clamping cylinder has jack ram construction for fast energy efficient traverse
- Linear transducer for clamp positioning
- Proportional valve controls for clamp open/close speed, low pressure close, clamp tonnage and decompression
- Position based braking closed loop clamp control
- Recirculation filter (5-micron) and auto cooling system with independent pump and heat exchanger
- Overhead hydraulic reservoir with prefill valves for each cylinder
- Manually operated front and powered gates (optional)
- Mechanical knock-out plate with position adjustment
- Automatic central lubrication system

3-Tonnage Cylinders



Way Support System & Large Moving Platen Support

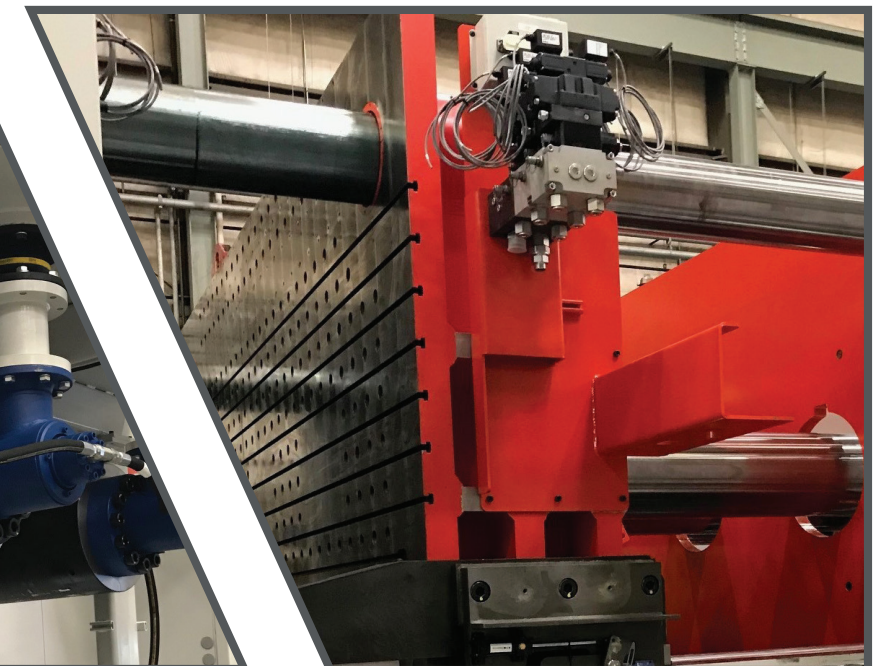


INJECTION UNIT

Milacron offers a wide selection of injection unit sizes, barrels and screws for the LPIM Series, increasing customer flexibility in processing.


- 🔴 Closed loop injection control
- 🔴 Independent five-stage injection speed and pressure control
- 🔴 6000 PSI injection pressure per accumulator (10,000 PSI available as an option)
- 🔴 Injection speeds infinitely adjustable
- 🔴 Linear transducers built into injection cylinders for shot accuracy and protection from heat and mechanical damage
- 🔴 Melt shut-off valve between accumulator and extruder for accurate shot-to-shot repeatability

- 🔴 Nozzle hydraulic manifold with ball valves for positive, leak free operation
- 🔴 Horizontal melt manifolds (supplied as part of machine)
- 🔴 Xaloy 800 or equivalent melt accumulator barrel and plunger for abrasion resistance and long life with recycled materials
- 🔴 Light weight tubular modular melt manifold extension blocks for ease of installation (supplied as standard machine equipment)
- 🔴 Longer inlet tubes for improved work area access during nozzle set up
- 🔴 Capability for eight discrete shot sizes per melt accumulator
- 🔴 Controls & hardware for thirty-two independent nozzle sequences standard

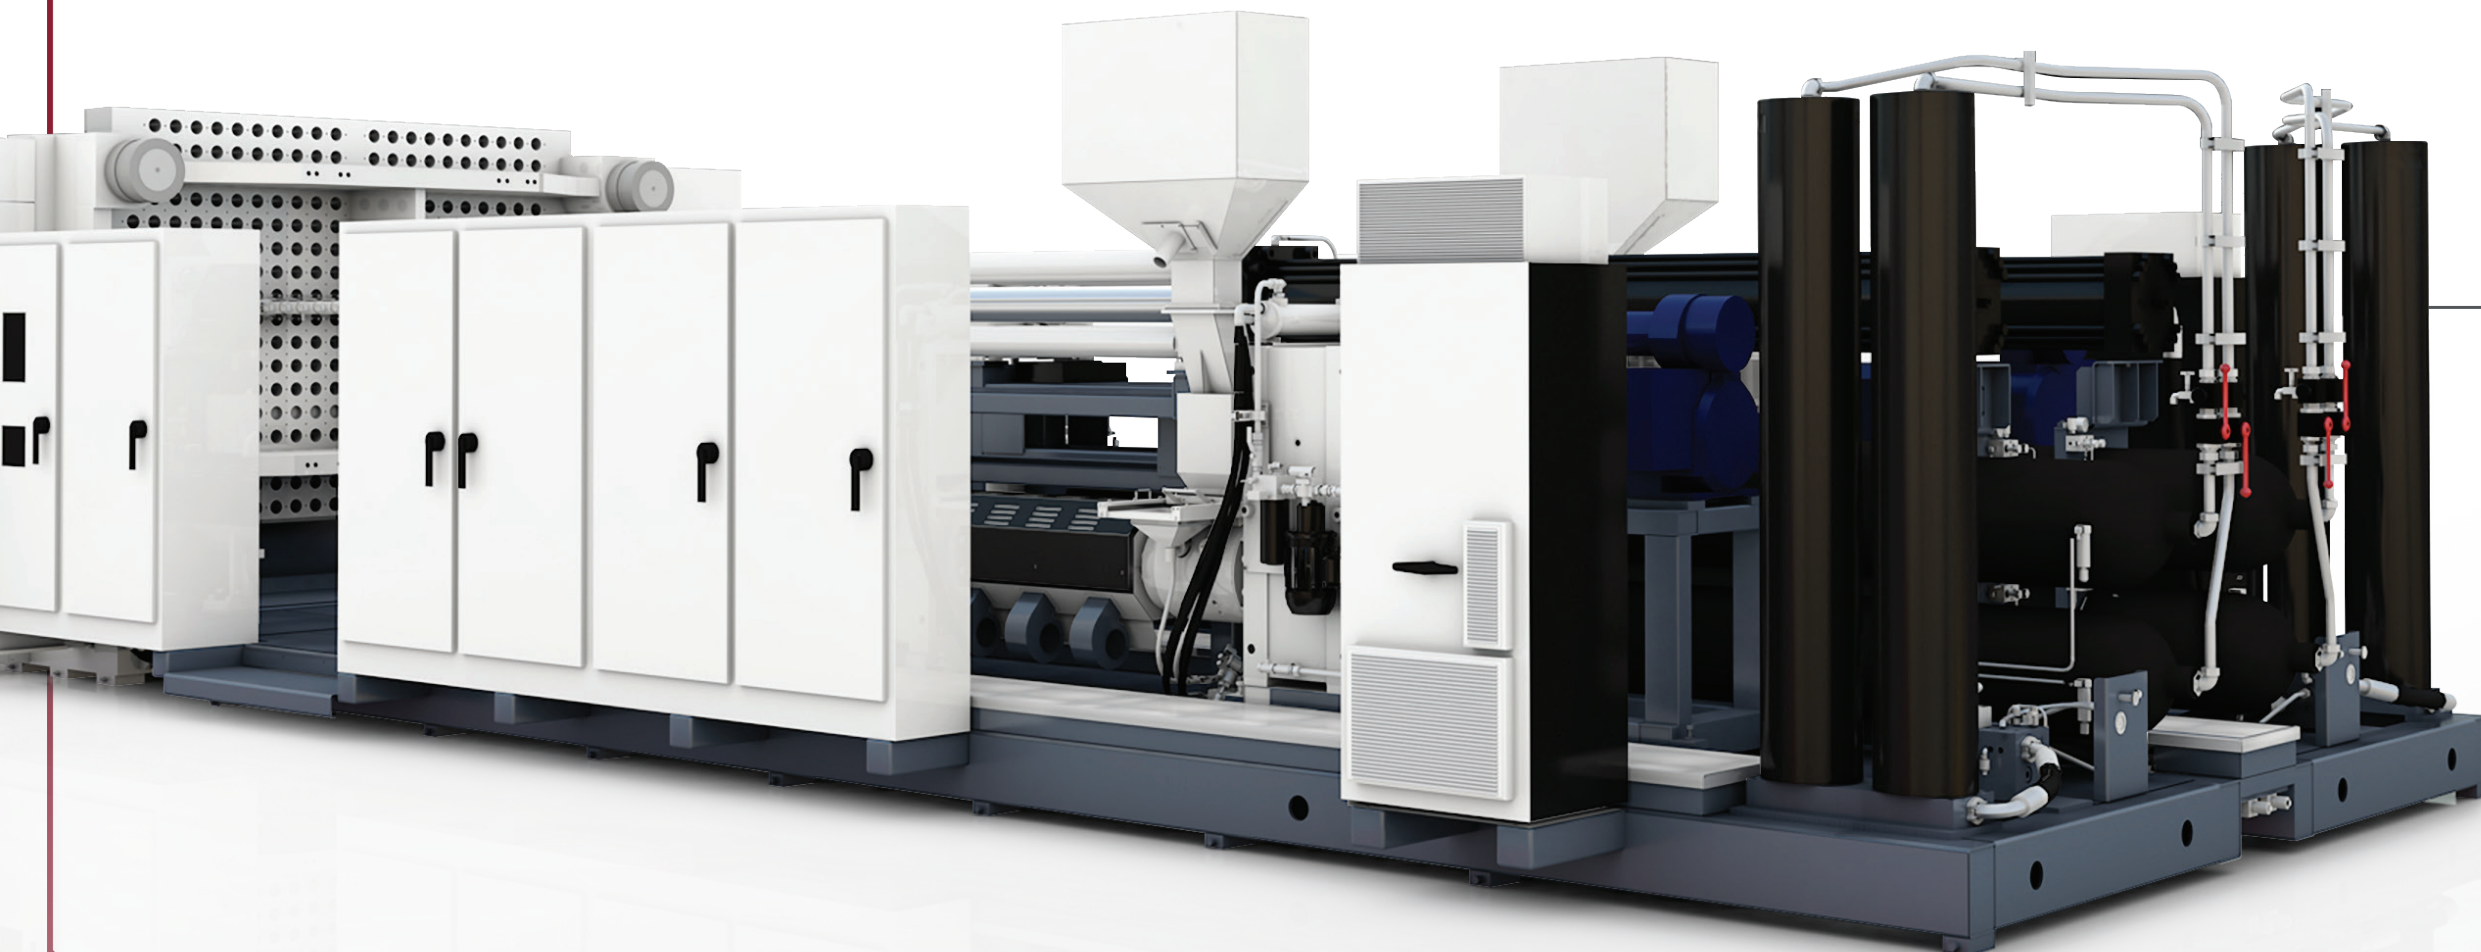

In-Line Injection/Extruder design for better maintenance access

Injection Piston accumulators for consistent injection velocity across complete shot size

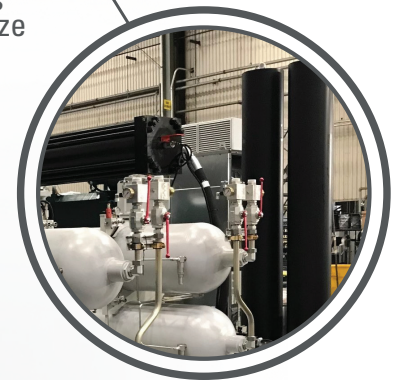

MOSAIC+ CONTROLLER SYSTEM

It's easy to maximize the reliability and adaptability of Milacron machines with the ergonomic touch-screen control of MOSAIC+. Fast processing speeds power extensive data collection and report generation, as well as integration with automation controls to further simplify the whole process.

EXCEPTIONAL STANDARD FEATURES

- ➊ Multi-touch capable 21.5" HD touch screen
- ➋ Intuitive operator interface
- ➌ Configurable screen layout
- ➍ Remote mounted IP camera interface
- ➎ Windows based operating system
- ➏ Optional integrated Mold-Master hot runner control




MOSAIC+ Screen versatility gives the operator simultaneous views of multiple machine functions and related equipment, such as hot runner control and remote mounted IP cameras.

- ➐ Set point overview page for quick access – actual set points for each axis at the bottom of the page
- ➑ Display of 700 process monitor samples stored on control or virtually unlimited samples on USB stick or network drive via reports
- ➒ Graphic display of 33 integrated soft keys with LED's located below screen
- ➓ Process monitoring of over 50 possible parameters with graphically displayed min, max, and average
- ➔ 8 + 8 freely configurable I/O
- ➕ Self diagnostic and fault finding capability
- ➖ 8 SPC distribution, XBar, and R charts with over 50 possible parameters
- ➗ Data protection with 4 access levels for up to 30 machine operators
- ➘ Fully-configurable cores
- ➙ Save mold data and screen shots to USB keys
- ➚ Change log and alarm log are 700 events on the control, virtually unlimited on USB stick or network drive via reports

PLUS SCREEN TECHNOLOGY


The PLUS section has four configurable window spaces. In this section, the operator can choose to show:

- ➊ Four small windows
- ➋ One large and two small windows
- ➌ Two large windows

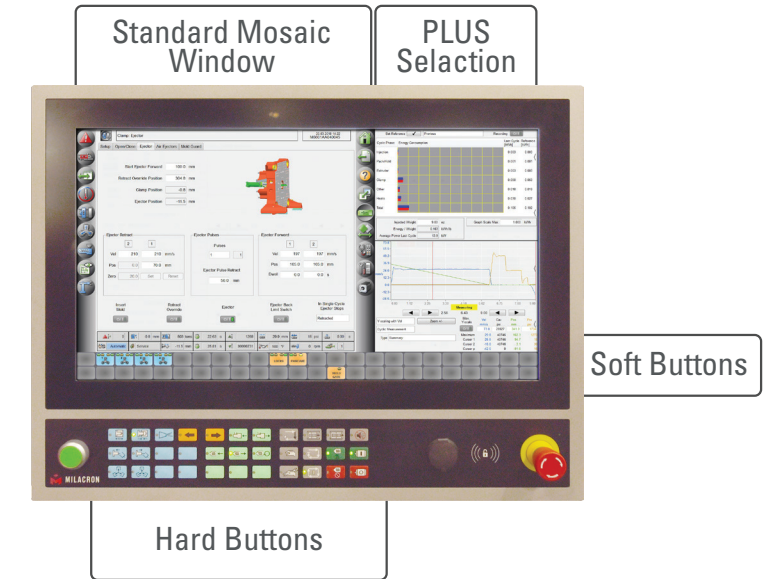

Content choices for the four windows include:

- ➊ Alarms log
- ➋ Energy overview
- ➌ Production run
- ➍ Injection graphics
- ➎ Trend data analysis
- ➏ Trend graphics
- ➐ Cycle analysis
- ➑ SPC charts
- ➒ Integrated robot, dryer and hot runner (optional)
- ➓ Status page
- ➔ Integrated camera with zoom capability (optional)

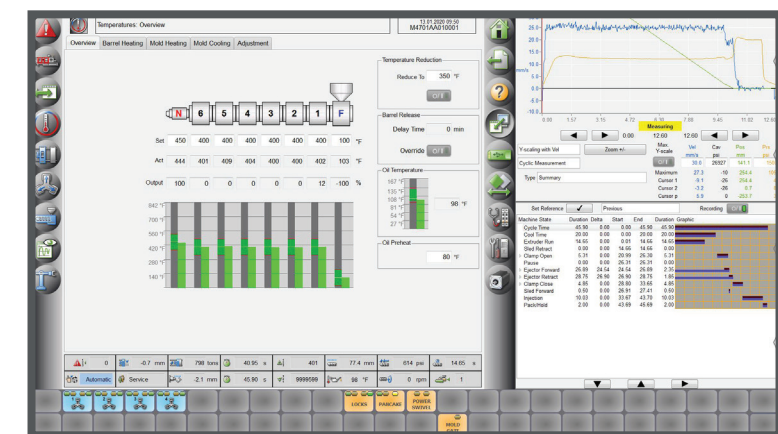

LPIM CAPACITY

ULTIMATE LARGE PART MANUFACTURING FLEXIBILITY

Today's LP systems are capable of easily molding multi-part assemblies in a single cycle, or you can mold several of the same large part simultaneously. Either way, a Milacron LPIM Machine can streamline your production operation.

The LP is available with either single or twin extruders to meet your processing needs. Shot sizes up to 400 lbs. (180 kg) enable high production throughput of up to 6400 lbs/hr (2902 kg/hr). Accumulators enable efficient energy use and materials availability when needed. Variable speed AC Vector drives with heavy-duty gear reducer ensure energy-efficient operation.

LP systems feature a heavy-duty modular design and a very large platen to accommodate large parts, family molds and multi-part production. Platens up to 110"x200" (2,800 x 5,080mm) are available with up to 280 injection nozzle locations. Clamping forces to 2,500 tons are available to meet the most rigorous demands.

- Ⓜ Machine Range from 500 to 2500 US Tons
- Ⓜ Shot sizes up to 400 lbs.
- Ⓜ Extruder outputs up to 6400 lbs./hr.
- Ⓜ Platen sizes up to 110" x 200"



SERVO- HYDRAULIC SYSTEM

BENEFITS INCLUDE





- Ⓜ Ability to remotely monitor for troubleshooting and analysis
- Ⓜ Improved cycle precision and repeatability – closed loop system
- Ⓜ Reduced energy consumption
- Ⓜ Increased accuracy and precision – rotational control to a fraction of a degree
- Ⓜ High response – low inertia
- Ⓜ Noise reduction – up to 80% quieter than conventional hydraulic machines
- Ⓜ Reduced sensitivity to contamination
- Ⓜ Increased reliability and lower maintenance costs
- Ⓜ Bi-directional pump for fast response in pressure control
- Ⓜ Pump is stopped intermittently during the cycle
- Ⓜ Servo-system designed for demanding and diverse applications


FANUC HIGH-PERFORMANCE, HIGH-EFFICIENCY SERVO-MOTORS

- Ⓜ 50 years mean time between failures (MTBF)
- Ⓜ High-efficiency servo-system uses power generated during deceleration of motors, excellent energy-saving performance
- Ⓜ Designed to meet global safety standards (ANSI and CE)
- Ⓜ FANUC motors use high-energy neodymium magnets, for superior cost and performance ratios

The LPIM's enhanced machine specifications and performance are powered by proven FANUC servo-motor power packs for improved reliability, higher max mold weights, faster clamp speeds and added tonnage sizes. Utilizing a FANUC servo-system results in a longer machine component life while also increasing oil life. The motor/pump only delivers oil as needed which reduces heat generation and water consumption.

LPIM BREAKTHROUGHS FOR HIGHLY RECYCLED CONTENT

-  Melt Unit with a fixed Single Screw Extruder and proprietary Milacron LPIM screw design allows for homogeneous melt with up to 100% regrind
-  Melt Delivery System designed with large melt channels to accommodate contaminants without clogging nozzles/gates
-  Melt Filtration options available
-  iMFLUX Technology available to adjust to viscosity changes common in high regrind content

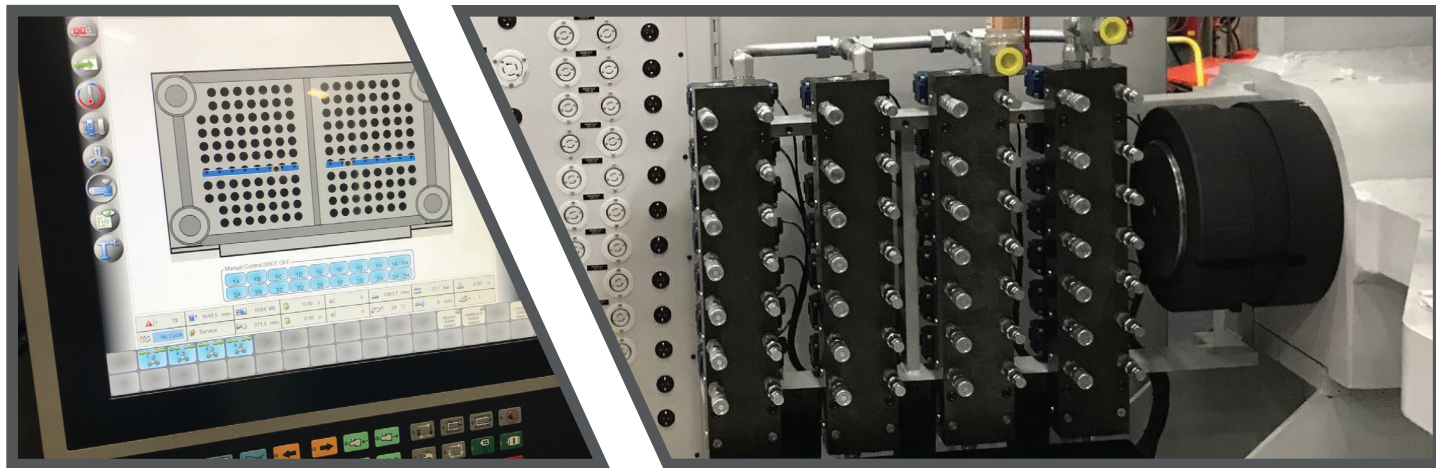

STANDARD FEATURES

	Standard	Optional
GENERAL		
3-Platen clamp system with dual outboard clamping cylinders and central traversing cylinder for fast clamp speeds and balanced clamping force	●	
Power Pack driven by Fanuc AC servo motor and drive package	●	
Direct control of pressure and flow via internal gear pumps	●	
Improved Melt Base extruder/gearbox layout for better maintenance accessibility	●	
Independent full-time kidney loop filtration and cooling (optional external filtration system)	●	
Filtration to 5-micron with clog detection and alarm	●	
High clamp base design for part removal and easy access to clamp area	●	
SPI-AN146/Euromap 67 robot interface	●	
Robot mounting holes on stationary platen		○
Powered operator's or non-operator's gates		○
Leveling Pads	●	
Integrated gas assist controller		○
Stationary platen nozzle access platforms		○
Structural web interface (for external controller)	●	
Structural web controls and nitrogen gas unit		○
Mold water manifold package – stainless steel		○

	Standard	Optional
CLAMP		
Way Support System – Parallel to lower tie bars with precision hardened way rails, adjustable bronze shoes and intermediate support for increased mold carrying capacity and reduced tie bar wear	●	
120" Max Daylight, 12" min daylight on all models (extended daylight/stroke optional)	●	○
Improved clamp speed (20"/sec) from prior models	●	
Mechanical knock-out plate with position adjustment (Hydraulic ejector plate optional) with reduced daylight	●	○
Services Cable Track moved to non-operator's side from under clamp for easier access	●	
Automatic central lubrication system	●	
Proportional hydraulic core & ejector package (2 cores, 2 ejectors 500 ton)	●	
(4 cores, 2 ejectors >750 ton)	●	
Semi-automatic tie bar puller (operator side)		○
Mold air system and pneumatic core package		○

	Standard	Optional
INJECTION		
Closed loop injection control	●	
Independent five-stage injection speed and pressure control	●	
Eight (8) shot sizes per accumulator	●	
6000 PSI melt pressure per accumulator (10,000 psi optional)	●	○
Linear transducers built into shot cylinders for shot accuracy and protection from heat and mechanical damage	●	
Xaloy 800 or equivalent accumulator and plunger for abrasion resistance and long life with recycled materials	●	
20 manifold extension temperature control zones (30 or 40 optional)	●	○
32 nozzle temperature control zones (up to 96 optional)	●	○
32 Independent sequential nozzle hydraulic controls (up to 96 optional)	●	○
Plunger pullback color change system		○
Dual Melt Manifolds (for applications with many nozzles)		○
Structural foam & structural web nozzles		○
Manifold extension blocks		○
Semi-Automatic melt manifold purge system for faster color change		○

	Standard	Optional
EXTRUDER		
Electromechanical extruder variable speed drive with AC motor and heavy-duty gear reducer for high efficiency, long life and minimum maintenance	●	
Xaloy 101 or equivalent extruder barrel for corrosion and abrasion resistance (X800 or equivalent available for abrasive materials)	●	○
Special SF screw design with colmonoy 56 flights; two-stage; 32:1 L/D ratio for high output of HDPE. (Colmonoy 83 flights flights optional)	●	
Nitrogen port and controls for introduction of gas into extruder barrel and decompression zone of screw.	●	○
Dynamic mixing screw section for homogeneous dispersion of gas and melt	●	
High efficiency closed loop, extruder air barrel cooling system for long life and low maintenance	●	
Water cooled feed throat	●	
Relief valve for purging during shutdown or color change	●	
Large capacity relief valve purge pan with PFZ teflon non-stick coating	●	
Para-flex flexible coupling between AC drive motor and gear box	●	
Dynisco pressure transducers for head and gas port pressure measurements and alarms	●	
Material hopper and feed throat magnet with clean out is supplied with each extruder (Dual drawer magnet optional)	●	○

OPTIONAL CONFIGURATIONS

The Milacron team knows the big picture of processing. That's why we deliver with cutting edge machine systems with auxiliary equipment & robots, exceptional aftermarket support and the know-how to bring your ideas to life – quickly, profitably and with a global perspective.

- 🔧 Gas Assist Controllers
- 🔧 Cavity Pressure Controls Systems
- 🔧 Hot Runner Controls Systems
- 🔧 Quick Mold Change Systems



M-POWERED

M-POWERED INTELLIGENCE

- 🔧 M-POWERED leverages the latest in Industrial Internet of Things (IIoT) and data science to contribute unique insights and intelligence into your machine's current operations and future needs.
- 🔧 Accompany the growing list of M-Powered customers that are experiencing a reduction in service trips and up to a 50% reduction in time to resolution of unplanned downtime events.
- 🔧 Once an appointment is confirmed, a Milacron technician will be at your facility within the next 10 days to bring your machine online. Alternative connection choices are possible in the event of a more complex IT setup.

M·POWERED

M-Powered Applications	ADVANTAGE	ESSENTIAL	PREMIER
Connect Portal	✓	✓	✓
Technical Support	On Demand (payable per hour)	✓	✓ (24/7)
Production Monitoring	✓	✓	✓
Downtime Tracking		✓	✓
Preventative Maintenance			✓
Predictive Analytics			✓

THE LP500M SERIES


**LOW PRESSURE
MULTI NOZZLE SERIES**

TONNAGE: 500

**TECHNICAL
SPECIFICATIONS**

Melt Unit: 423

LP500M-423		
	ENGLISH METRIC	
Clamp		
Clamp Tonnage	tons tonnes	500 454
Platen Size (H x V)	in mm	89 x 98 2,261 x 2,489
Distance Between Tie Bars	in mm	67.5 x 58.5 1,715 x 1,486
Tie Bar Diameter	in mm	7.5 191
Max. Clamp Opening (Daylight)	in mm	120 3,048
Clamp Stroke	in mm	108 2,743
Min. Mold Shut Height	in mm	12 305
Clamp Speed Max	in/sec mm/sec	14 356
Mold Carrying Capacity (Moving Platen)	lbs kg	35,000 15,876
Way Support System		Standard
Extruder		
Number of Extruders		1
Screw Diameter	in mm	4.5 114
L/D Ratio		30:1
Output HDPE or P.S. (total)	lbs/hr kg/hr	900 408
Drive Size	Hp kW	250 186.4
Barrel Heating\Cooling Zones		5
Barrel Cooling Type		Air Barrel Cooling

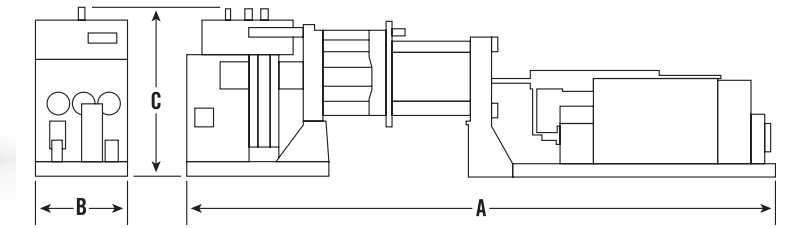

LP500M-423		
	ENGLISH METRIC	
Injection		
Number of Accumulators		1
Total Shot Weight (Shot Size) PS/HDPE	lbs kg	75/60 34/27
Accumulators Volume (Each)	in ³ cm ³	2,300 37,690
Total Shot Volume	in ³ cm ³	2,300 37,690
Pressure Maximum (Per Accum.)	psi bar	6,000 414
Total Number of Shot Sizes		16
Independent Nozzle Sequence		32
Nozzle		
Multiple Nozzles		As Required
Nozzle Spacing	in mm	6 x 6 152 x 152
Number of Nozzle Locations		180
Nozzle Heat Control Zones		32
Manifold Extension Heat Control Zones		20
Nozzle Hydraulic Controls		32

LP500M-423			
		ENGLISH METRIC	
A	Est. Configuration Length	ft m	60 18.3
B	Est. Configuration Width	ft m	12 3.7
C	Est. Configuration Height (without air bags)	ft m	13 3.9
	Est. Configuration Weight	tons tonnes	113 103
	Est. Power Consumption @ 85% Output	kW/hr	360

Notes

1) All machine dimensions and specifications are subject to change. Values are for reference only. All general assembly drawings or visuals included herein are for reference only. Please consult the general assembly drawing from a Milacron representative.

THE LP500M SERIES

**LOW PRESSURE
MULTI NOZZLE SERIES**


TONNAGE: 500

**TECHNICAL
SPECIFICATIONS**

Melt Unit: 2 x 423

LP500M-2 x 423

	ENGLISH METRIC	
Clamp		
Clamp Tonnage	tons tonnes	500 454
Platen Size (H x V)	in mm	89 x 98 2,261 x 2,489
Distance Between Tie Bars	in mm	67.5 x 58.5 1,715 x 1,486
Tie Bar Diameter	in mm	7.5 191
Max. Clamp Opening (Daylight)	in mm	120 3,048
Clamp Stroke	in mm	108 2,743
Min. Mold Shut Height	in mm	12 305
Clamp Speed Max	in/sec mm/sec	14 356
Mold Carrying Capacity (Moving Platen)	lbs kg	35,000 15,876
Way Support System		Standard
Extruder		
Number of Extruders		2
Screw Diameter	in mm	4.5 114
L/D Ratio		30:1
Output HDPE or P.S. (total)	lbs/hr kg/hr	1,800 817
Drive Size	Hp kW	250 x 2 186.4 x 2
Barrel Heating\Cooling Zones		5 x 2
Barrel Cooling Type		Air Barrel Cooling

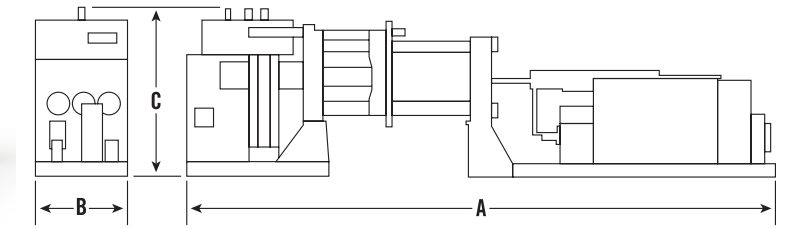

LP500M-2 x 423

	ENGLISH METRIC	
Injection		
Number of Accumulators		2
Total Shot Weight (Shot Size) PS/HDPE	lbs kg	150/120 68/54
Accumulators Volume (Each)	in ³ cm ³	2,300 37,690
Total Shot Volume	in ³ cm ³	4,600 75,380
Pressure Maximum (Per Accum.)	psi bar	6,000 414
Total Number of Shot Sizes		16
Independent Nozzle Sequence		32
Nozzle		
Multiple Nozzles		As Required
Nozzle Spacing	in mm	6 x 6 152 x 152
Number of Nozzle Locations		180
Nozzle Heat Control Zones		32
Manifold Extension Heat Control Zones		20
Nozzle Hydraulic Controls		32

LP500M-2 x 423

		ENGLISH METRIC	
A	Est. Configuration Length	ft m	60 18.3
B	Est. Configuration Width	ft m	12 3.7
C	Est. Configuration Height (without air bags)	ft m	13 3.9
	Est. Configuration Weight	tons tonnes	113 103
	Est. Power Consumption @ 85% Output	kW/hr	490

Notes

1) All machine dimensions and specifications are subject to change. Values are for reference only. All general assembly drawings or visuals included herein are for reference only. Please consult the general assembly drawing from a Milacron representative.

THE LP500M SERIES


**LOW PRESSURE
MULTI NOZZLE SERIES**

TONNAGE: 500

**TECHNICAL
SPECIFICATIONS**

Melt Unit: 646

LP500M-646		
	ENGLISH METRIC	
Clamp		
Clamp Tonnage	tons tonnes	500 454
Platen Size (H x V)	in mm	89 x 98 2,261 x 2,489
Distance Between Tie Bars	in mm	67.5 x 58.5 1,715 x 1,486
Tie Bar Diameter	in mm	7.5 191
Max. Clamp Opening (Daylight)	in mm	120 3,048
Clamp Stroke	in mm	108 2,743
Min. Mold Shut Height	in mm	12 305
Clamp Speed Max	in/sec mm/sec	14 356
Mold Carrying Capacity (Moving Platen)	lbs kg	35,000 15,876
Way Support System		Standard
Extruder		
Number of Extruders		1
Screw Diameter	in mm	6 152
L/D Ratio		30:1
Output HDPE or P.S. (total)	lbs/hr kg/hr	2,400 1,090
Drive Size	Hp kW	500 372.8
Barrel Heating\Cooling Zones		5
Barrel Cooling Type		Air Barrel Cooling

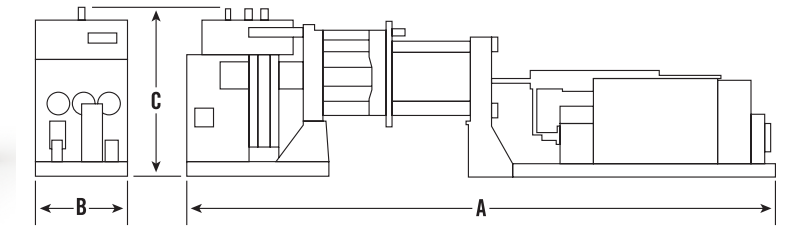

LP500M-646		
	ENGLISH METRIC	
Injection		
Number of Accumulators		2
Total Shot Weight (Shot Size) PS/HDPE	lbs kg	150/120 68/54
Accumulators Volume (Each)	in ³ cm ³	2,300 37,690
Total Shot Volume	in ³ cm ³	4,600 75,380
Pressure Maximum (Per Accum.)	psi bar	6,000 414
Total Number of Shot Sizes		16
Independent Nozzle Sequence		32
Nozzle		
Multiple Nozzles		As Required
Nozzle Spacing	in mm	6 x 6 152 x 152
Number of Nozzle Locations		180
Nozzle Heat Control Zones		32
Manifold Extension Heat Control Zones		20
Nozzle Hydraulic Controls		32

LP500M-646			
		ENGLISH METRIC	
A	Est. Configuration Length	ft m	60 18.3
B	Est. Configuration Width	ft m	12 3.7
C	Est. Configuration Height (without air bags)	ft m	13 3.9
	Est. Configuration Weight	tons tonnes	113 103
	Est. Power Consumption @ 85% Output	kW/hr	490

Notes

1) All machine dimensions and specifications are subject to change. Values are for reference only. All general assembly drawings or visuals included herein are for reference only. Please consult the general assembly drawing from a Milacron representative.

THE LP750MWP SERIES


**LOW PRESSURE
MULTI NOZZLE SERIES**

TONNAGE: 750

**TECHNICAL
SPECIFICATIONS**

Melt Unit: 2 x 423

LP750MWP-2 x 423			
	ENGLISH	METRIC	
Clamp			
Clamp Tonnage	tons	tonnes	750 680
Platen Size (H x V)	in	mm	167 x 86 4,241 x 2,184
Distance Between Tie Bars	in	mm	137 x 44 3,480 x 1,117
Tie Bar Diameter	in	mm	11 279
Max. Clamp Opening (Daylight)	in	mm	120 3,048
Clamp Stroke	in	mm	108 2,743
Min. Mold Shut Height	in	mm	12 305
Clamp Speed Max	in/sec	mm/sec	14 356
Mold Carrying Capacity (Moving Platen)	lbs	kg	35,000 15,876
Way Support System			Standard
Extruder			
Number of Extruders			2
Screw Diameter	in	mm	4.5 114
L/D Ratio			30:1
Output HDPE or P.S. (total)	lbs/hr	kg/hr	1,800 817
Drive Size	Hp	kW	250 x 2 186.4 x 2
Barrel Heating\Cooling Zones			5 x 2
Barrel Cooling Type			Air Barrel Cooling

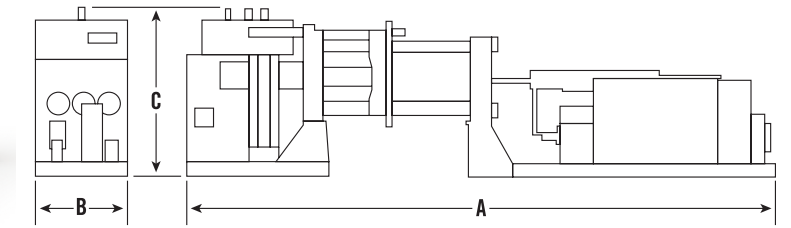

LP750MWP-2 x 423			
	ENGLISH	METRIC	
Injection			
Number of Accumulators			2
Total Shot Weight (Shot Size) PS/HDPE	lbs	kg	150/120 68/54
Accumulators Volume (Each)	in ³	cm ³	2,300 37,690
Total Shot Volume	in ³	cm ³	4,600 75,380
Pressure Maximum (Per Accum.)	psi	bar	6,000 414
Total Number of Shot Sizes			16
Independent Nozzle Sequence			32
Nozzle			
Multiple Nozzles			As Required
Nozzle Spacing	in	mm	6 x 6 152 x 152
Number of Nozzle Locations			218
Nozzle Heat Control Zones			32
Manifold Extension Heat Control Zones			20
Nozzle Hydraulic Controls			32

LP750MWP-2 x 423			
		ENGLISH	METRIC
A	Est. Configuration Length	ft	60 18.3
B	Est. Configuration Width	ft	17 5.1
C	Est. Configuration Height (without air bags)	ft	13 3.9
	Est. Configuration Weight	tons	155 141
	Est. Power Consumption @ 85% Output	kW/hr	490

Notes

1) All machine dimensions and specifications are subject to change. Values are for reference only. All general assembly drawings or visuals included herein are for reference only. Please consult the general assembly drawing from a Milacron representative.

THE LP750MWP SERIES


**LOW PRESSURE
MULTI NOZZLE SERIES**

TONNAGE: 750

**TECHNICAL
SPECIFICATIONS**

Melt Unit: 2 x 630

LP750MWP-2 x 630			
	ENGLISH	METRIC	
Clamp			
Clamp Tonnage	tons	tonnes	750 680
Platen Size (H x V)	in	mm	167 x 86 4,241 x 2,184
Distance Between Tie Bars	in	mm	137 x 44 3,480 x 1,117
Tie Bar Diameter	in	mm	11 279
Max. Clamp Opening (Daylight)	in	mm	120 3,048
Clamp Stroke	in	mm	108 2,743
Min. Mold Shut Height	in	mm	12 305
Clamp Speed Max	in/sec	mm/sec	14 356
Mold Carrying Capacity (Moving Platen)	lbs	kg	35,000 15,876
Way Support System			Standard
Extruder			
Number of Extruders			2
Screw Diameter	in	mm	6 152
L/D Ratio			30:1
Output HDPE or P.S. (total)	lbs/hr	kg/hr	4,800 2,180
Drive Size	Hp	kW	500 x 2 372.8 x 2
Barrel Heating\Cooling Zones			6 x 2
Barrel Cooling Type			Air Barrel Cooling

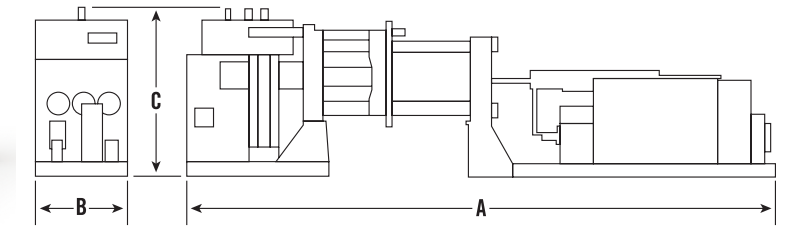

LP750MWP-2 x 630			
	ENGLISH	METRIC	
Injection			
Number of Accumulators			2
Total Shot Weight (Shot Size) PS/HDPE	lbs	kg	200160 91/73
Accumulators Volume (Each)	in ³	cm ³	3,000 49,161
Total Shot Volume	in ³	cm ³	6,000 98,322
Pressure Maximum (Per Accum.)	psi	bar	6,000 414
Total Number of Shot Sizes			16
Independent Nozzle Sequence			32
Nozzle			
Multiple Nozzles			As Required
Nozzle Spacing	in	mm	6 x 6 152 x 152
Number of Nozzle Locations			218
Nozzle Heat Control Zones			32
Manifold Extension Heat Control Zones			20
Nozzle Hydraulic Controls			32

LP750MWP-2 x 630			
		ENGLISH	METRIC
A	Est. Configuration Length	ft	62 18.9
B	Est. Configuration Width	ft	22 6.7
C	Est. Configuration Height (without air bags)	ft	13 3.9
	Est. Configuration Weight	tons	175 160
	Est. Power Consumption @ 85% Output	kW/hr	950

Notes

1) All machine dimensions and specifications are subject to change. Values are for reference only. All general assembly drawings or visuals included herein are for reference only. Please consult the general assembly drawing from a Milacron representative.

THE LP750MWP SERIES

**LOW PRESSURE
MULTI NOZZLE SERIES**


TONNAGE: 750

**TECHNICAL
SPECIFICATIONS**

Melt Unit:646

LP750MWP-646

	ENGLISH METRIC	
Clamp		
Clamp Tonnage	tons tonnes	750 680
Platen Size (H x V)	in mm	167 x 86 4,241 x 2,184
Distance Between Tie Bars	in mm	137 x 44 3,480 x 1,117
Tie Bar Diameter	in mm	11 279
Max. Clamp Opening (Daylight)	in mm	120 3,048
Clamp Stroke	in mm	108 2,743
Min. Mold Shut Height	in mm	12 305
Clamp Speed Max	in/sec mm/sec	14 356
Mold Carrying Capacity (Moving Platen)	lbs kg	35,000 15,876
Way Support System		Standard
Extruder		
Number of Extruders		1
Screw Diameter	in mm	6 152
L/D Ratio		30:1
Output HDPE or P.S. (total)	lbs/hr kg/hr	2,400 1,090
Drive Size	Hp kW	500 372.8
Barrel Heating\Cooling Zones		6
Barrel Cooling Type		Air Barrel Cooling

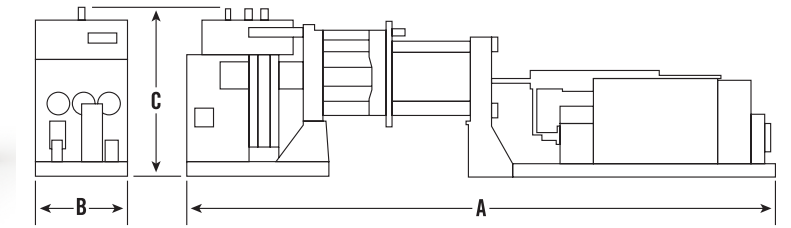

LP750MWP-646

	ENGLISH METRIC	
Injection		
Number of Accumulators		2
Total Shot Weight (Shot Size) PS/HDPE	lbs kg	150/120 68/54
Accumulators Volume (Each)	in ³ cm ³	2,300 37,690
Total Shot Volume	in ³ cm ³	4,600 75,380
Pressure Maximum (Per Accum.)	psi bar	6,000 414
Total Number of Shot Sizes		16
Independent Nozzle Sequence		32
Nozzle		
Multiple Nozzles		As Required
Nozzle Spacing	in mm	6 x 6 152 x 152
Number of Nozzle Locations		218
Nozzle Heat Control Zones		32
Manifold Extension Heat Control Zones		20
Nozzle Hydraulic Controls		32

LP750MWP-646

		ENGLISH METRIC	
A	Est. Configuration Length	ft m	62 18.9
B	Est. Configuration Width	ft m	17 5.1
C	Est. Configuration Height (without air bags)	ft m	13 3.9
	Est. Configuration Weight	tons tonnes	155 141
	Est. Power Consumption @ 85% Output	kW/hr	490

Notes

1) All machine dimensions and specifications are subject to change. Values are for reference only. All general assembly drawings or visuals included herein are for reference only. Please consult the general assembly drawing from a Milacron representative.

THE LP1000MWP SERIES

**LOW PRESSURE
MULTI NOZZLE SERIES**


TONNAGE: 1000

**TECHNICAL
SPECIFICATIONS**

Melt Unit:660

LP1000MWP-660

	ENGLISH METRIC	
Clamp		
Clamp Tonnage	tons tonnes	1,000 907
Platen Size (H x V)	in mm	167 x 103 4,242 x 2,616
Distance Between Tie Bars	in mm	137 x 44 3,480 x 1,118
Tie Bar Diameter	in mm	11 279
Max. Clamp Opening (Daylight)	in mm	120 3,048
Clamp Stroke	in mm	108 2,743
Min. Mold Shut Height	in mm	12 305
Clamp Speed Max	in/sec mm/sec	14 356
Mold Carrying Capacity (Moving Platen)	lbs kg	35,000 15,876
Way Support System		Standard
Extruder		
Number of Extruders		1
Screw Diameter	in mm	6 152
L/D Ratio		30:1
Output HDPE or P.S. (total)	lbs/hr kg/hr	2,400 1,090
Drive Size	Hp kW	500 372.8
Barrel Heating\Cooling Zones		6
Barrel Cooling Type		Air Barrel Cooling

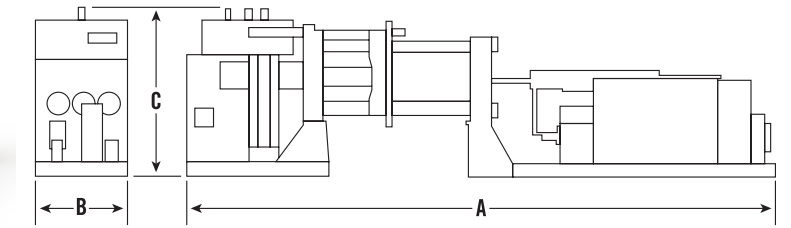

LP1000MWP-660

	ENGLISH METRIC	
Injection		
Number of Accumulators		2
Total Shot Weight (Shot Size) PS/HDPE	lbs kg	200/160 91/73
Accumulators Volume (Each)	in ³ cm ³	3,000 49,161
Total Shot Volume	in ³ cm ³	6,000 98,322
Pressure Maximum (Per Accum.)	psi bar	6,000 414
Total Number of Shot Sizes		16
Independent Nozzle Sequence		32
Nozzle		
Multiple Nozzles		As Required
Nozzle Spacing	in mm	6 x 6 152 x 152
Number of Nozzle Locations		256
Nozzle Heat Control Zones		32
Manifold Extension Heat Control Zones		20
Nozzle Hydraulic Controls		32

LP1000MWP-660

		ENGLISH METRIC	
A	Est. Configuration Length	ft m	62 18.9
B	Est. Configuration Width	ft m	16 4.9
C	Est. Configuration Height (without air bags)	ft m	14 4.26
	Est. Configuration Weight	tons tonnes	160 145
	Est. Power Consumption @ 85% Output	kW/hr	450

Notes

1) All machine dimensions and specifications are subject to change. Values are for reference only. All general assembly drawings or visuals included herein are for reference only. Please consult the general assembly drawing from a Milacron representative.

THE LP1000MWP SERIES


LOW PRESSURE MULTI NOZZLE SERIES

TONNAGE: 1000

TECHNICAL SPECIFICATIONS

Melt Unit: 2 x 630

LP1000MWP-630			
	ENGLISH	METRIC	
Clamp			
Clamp Tonnage	tons	tonnes	1,000 907
Platen Size (H x V)	in	mm	167 x 103 4,242 x 2,616
Distance Between Tie Bars	in	mm	137 x 44 3,480 x 1,118
Tie Bar Diameter	in	mm	11 279
Max. Clamp Opening (Daylight)	in	mm	120 3,048
Clamp Stroke	in	mm	108 2,743
Min. Mold Shut Height	in	mm	12 305
Clamp Speed Max	in/sec	mm/sec	14 356
Mold Carrying Capacity (Moving Platen)	lbs	kg	35,000 15,876
Way Support System			Standard
Extruder			
Number of Extruders			2
Screw Diameter	in	mm	6 152
L/D Ratio			30:1
Output HDPE or P.S. (total)	lbs/hr	kg/hr	4,800 2,180
Drive Size	Hp	kW	500 x 2 372.8 x 2
Barrel Heating\Cooling Zones			6 x 2
Barrel Cooling Type			Air Barrel Cooling

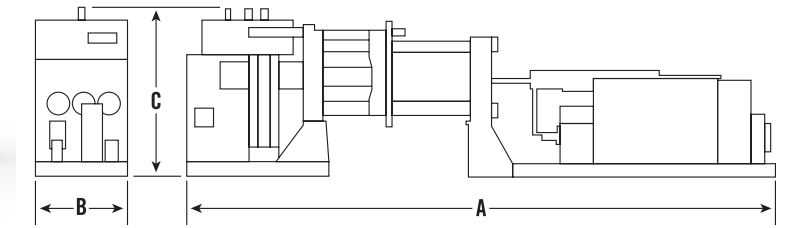

LP1000MWP-630			
	ENGLISH	METRIC	
Injection			
Number of Accumulators			2
Total Shot Weight (Shot Size) PS/HDPE	lbs	kg	200/160 91/73
Accumulators Volume (Each)	in ³	cm ³	3,000 49,161
Total Shot Volume	in ³	cm ³	6,000 98,322
Pressure Maximum (Per Accum.)	psi	bar	6,000 414
Total Number of Shot Sizes			16
Independent Nozzle Sequence			32
Nozzle			
Multiple Nozzles			As Required
Nozzle Spacing	in	mm	6 x 6 152 x 152
Number of Nozzle Locations			256
Nozzle Heat Control Zones			32
Manifold Extension Heat Control Zones			20
Nozzle Hydraulic Controls			32

LP1000MSWP-2 x 630			
		ENGLISH	METRIC
A	Est. Configuration Length	ft	m
		62	18.9
B	Est. Configuration Width	ft	m
		22	6.7
C	Est. Configuration Height (without air bags)	ft	m
		13	3.9
	Est. Configuration Weight	tons	tonnes
		185	167
	Est. Power Consumption @ 85% Output	kW/hr	
			950

Notes

1) All machine dimensions and specifications are subject to change. Values are for reference only. All general assembly drawings or visuals included herein are for reference only. Please consult the general assembly drawing from a Milacron representative.

THE LP1000MSWP SERIES

LOW PRESSURE MULTI NOZZLE SERIES


TONNAGE: 1000

TECHNICAL SPECIFICATIONS

Melt Unit: 2 x 630

LP1000MSWP-2 x 630

	ENGLISH METRIC	
Clamp		
Clamp Tonnage	tons tonnes	1,000 907
Platen Size (H x V)	in mm	186 x 103 4,724 x 2,616
Distance Between Tie Bars	in mm	144 x 60 3,658 x 1,524
Tie Bar Diameter	in mm	11 279
Max. Clamp Opening (Daylight)	in mm	120 3,048
Clamp Stroke	in mm	108 2,743
Min. Mold Shut Height	in mm	12 305
Clamp Speed Max	in/sec mm/sec	14 356
Mold Carrying Capacity (Moving Platen)	lbs kg	35,000 15,876
Way Support System		Standard
Extruder		
Number of Extruders		2
Screw Diameter	in mm	6 152
L/D Ratio		30:1
Output HDPE or P.S. (total)	lbs/hr kg/hr	4,800 2,180
Drive Size	Hp kW	500 x 2 372.8 x 2
Barrel Heating\Cooling Zones		6 x 2
Barrel Cooling Type		Air Barrel Cooling

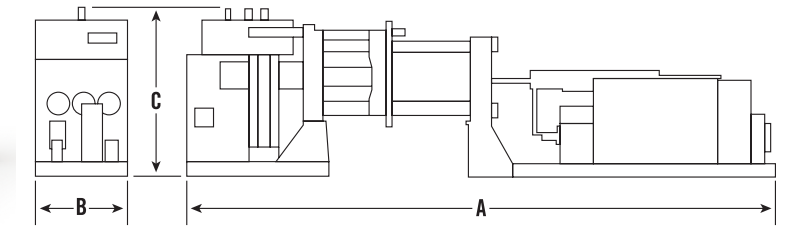

LP1000MSWP-2 x 630

	ENGLISH METRIC	
Injection		
Number of Accumulators		2
Total Shot Weight (Shot Size) PS/HDPE	lbs kg	200/160 91/73
Accumulators Volume (Each)	in ³ cm ³	3,000 49,161
Total Shot Volume	in ³ cm ³	6,000 98,322
Pressure Maximum (Per Accum.)	psi bar	6,000 414
Total Number of Shot Sizes		16
Independent Nozzle Sequence		32
Nozzle		
Multiple Nozzles		As Required
Nozzle Spacing	in mm	6 x 6 152 x 152
Number of Nozzle Locations		218
Nozzle Heat Control Zones		32
Manifold Extension Heat Control Zones		20
Nozzle Hydraulic Controls		32

LP1000MSWP-2 x 630

		ENGLISH METRIC	
A	Est. Configuration Length	ft m	62 18.9
B	Est. Configuration Width	ft m	22 6.7
C	Est. Configuration Height (without air bags)	ft m	13 3.9
	Est. Configuration Weight	tons tonnes	215 195
	Est. Power Consumption @ 85% Output	kW/hr	760

Notes

1) All machine dimensions and specifications are subject to change. Values are for reference only. All general assembly drawings or visuals included herein are for reference only. Please consult the general assembly drawing from a Milacron representative.

THE LP1500MHP SERIES


LOW PRESSURE MULTI NOZZLE SERIES

TONNAGE: 1500

TECHNICAL SPECIFICATIONS

Melt Unit: 2 x 630

LP1500MHP-2 x 630			
	ENGLISH	METRIC	
Clamp			
Clamp Tonnage	tons	tonnes	1,500 1,361
Platen Size (H x V)	in	mm	161 x 107 4,089 x 2,712
Distance Between Tie Bars	in	mm	125 x 69 3,175 x 1,752
Tie Bar Diameter (6 Tie Bar Machine)	in	mm	13 330
Max. Clamp Opening (Daylight)	in	mm	120 3,048
Clamp Stroke	in	mm	108 2,743
Min. Mold Shut Height	in	mm	12 305
Clamp Speed Max	in/sec	mm/sec	14 356
Mold Carrying Capacity (Moving Platen w/ Way Supports)	lbs	kg	50,000 22,688
Way Support System			Standard
Extruder			
Number of Extruders			2
Screw Diameter	in	mm	6 152
L/D Ratio			30:1
Output HDPE or P.S. (total)	lbs/hr	kg/hr	4,800 2,180
Drive Size	Hp	kW	500 x 2 372.8 x 2
Barrel Heating\Cooling Zones			6 x 2
Barrel Cooling Type			Air Barrel Cooling

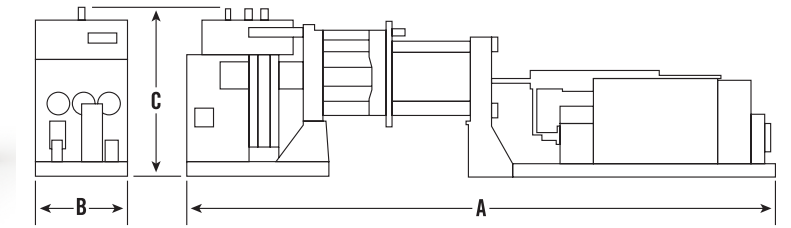

LP1500MHP-2 x 630			
	ENGLISH	METRIC	
Injection			
Number of Accumulators			2
Total Shot Weight (Shot Size) PS/HDPE	lbs	kg	200/160 91/73
Accumulators Volume (Each)	in ³	cm ³	3,000 49,161
Total Shot Volume	in ³	cm ³	6,000 98,322
Pressure Maximum (Per Accum.)	psi	bar	6,000 414
Total Number of Shot Sizes			16
Independent Nozzle Sequence			48
Nozzle			
Multiple Nozzles			As Required
Nozzle Spacing	in	mm	6 x 6 152 x 152
Number of Nozzle Locations			266
Nozzle Heat Control Zones			48
Manifold Extension Heat Control Zones			30
Nozzle Hydraulic Controls			48

LP1500MHP-2 x 630			
		ENGLISH	METRIC
A	Est. Configuration Length	ft	65 19.8
B	Est. Configuration Width	ft	21 6.4
C	Est. Configuration Height (without air bags)	ft	16 4.9
	Est. Configuration Weight	tons	250 227
	Est. Power Consumption @ 85% Output	kW/hr	1000

Notes

1) All machine dimensions and specifications are subject to change. Values are for reference only. All general assembly drawings or visuals included herein are for reference only. Please consult the general assembly drawing from a Milacron representative.

THE LP2500MHP SERIES


**LOW PRESSURE
MULTI NOZZLE SERIES**

TONNAGE: 2500

**TECHNICAL
SPECIFICATIONS**

Melt Unit: 2 x 646

LP2500MHP-2 x 646		
	ENGLISH METRIC	
Clamp		
Clamp Tonnage	tons tonnes	2,500 2,268
Platen Size (H x V)	in mm	200 x 110 5,080 x 2,794
Distance Between Tie Bars	in mm	72 x 53 x 2 1,829 x 1,346 x 2
Tie Bar Diameter (6 Tie Bar Machine)	in mm	4 x 13 & 2 x 15 4 x 330 & 2 x 381
Max. Clamp Opening (Daylight)	in mm	130 3,302
Clamp Stroke	in mm	120 3,048
Min. Mold Shut Height	in mm	10 254
Clamp Speed Max	in/sec mm/sec	14 356
Mold Carrying Capacity (Moving Platen w/ Way Supports)	lbs kg	35,000 22,688
Way Support System		Standard
Extruder		
Number of Extruders		2
Screw Diameter	in mm	6 152
L/D Ratio		30:1
Output HDPE or P.S. (total)	lbs/hr kg/hr	4,800 2,180
Drive Size	Hp kW	500 x 2 372.8 x 2
Barrel Heating\Cooling Zones		6 x 2
Barrel Cooling Type		Air Barrel Cooling




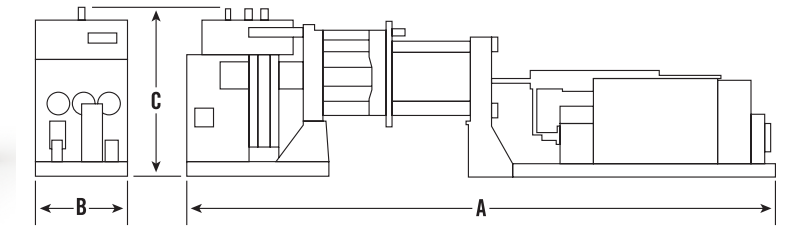


LP2500MHP-2 x 646		
	ENGLISH METRIC	
Injection		
Number of Accumulators		4
Total Shot Weight (Shot Size) PS/HDPE	lbs kg	300/240 136/108
Accumulators Volume (Each)	in ³ cm ³	2,300 37,690
Total Shot Volume	in ³ cm ³	9,200 150,760
Pressure Maximum (Per Accum.)	psi bar	6,000 414
Total Number of Shot Sizes		16
Independent Nozzle Sequence		48
Nozzle		
Multiple Nozzles		As Required
Nozzle Spacing	in mm	6 x 6 152 x 152
Number of Nozzle Locations		328
Nozzle Heat Control Zones		48
Manifold Extension Heat Control Zones		30
Nozzle Hydraulic Controls		48

LP2500MHP-2 x 646			
		ENGLISH METRIC	
A	Est. Configuration Length	ft m	72 21.9
B	Est. Configuration Width	ft m	22 6.7
C	Est. Configuration Height (without air bags)	ft m	13 3.9
	Est. Configuration Weight	tons tonnes	335 303
	Est. Power Consumption @ 85% Output	kW/hr	980

Notes

1) All machine dimensions and specifications are subject to change. Values are for reference only. All general assembly drawings or visuals included herein are for reference only. Please consult the general assembly drawing from a Milacron representative.

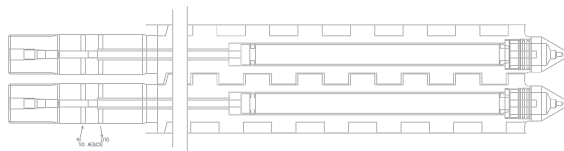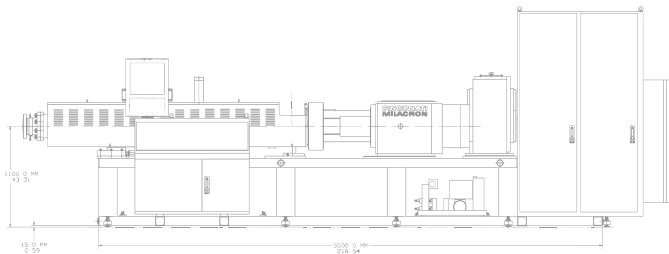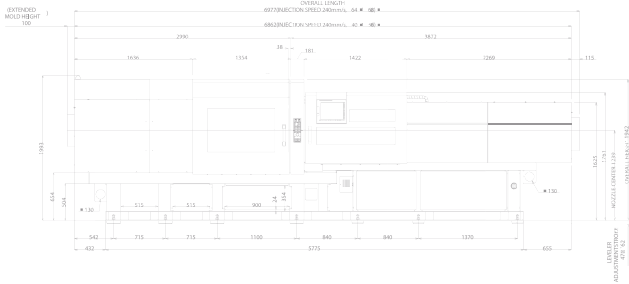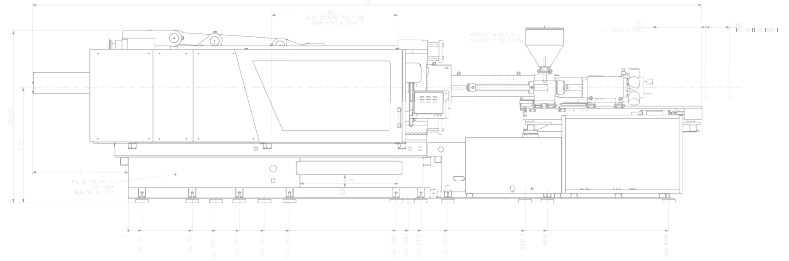

4165 Half Acre Rd., Batavia OH 45103
 513.536.2000
 info@milacron.com | www.milacron.com

©2020 Milacron LLC. All Rights Reserved.

